

**BRIGHT IDEAS.**



**BRIGHT INNOVATION.**

Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Trailers



(a subsidiary of Bright Coop, Inc.)

## Single Lift Transport Model: VPDDR-32

**Weight 8,600 lbs. Plus or Minus 3%**



The Single Lift Transport trailer was designed to move 4-wheel lift machines for the poultry industry. The single lift transport makes it easy to deliver an additional lift on site or to another location at a moments notice. Capacity: 26,000 lb. GVWR.



**BE BRIGHT - BUY RIGHT - BUY BRIGHT'S**

**BRIGHT IDEAS.**



**BRIGHT INNOVATION.**


Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Trailers



(a subsidiary of Bright Coop, Inc.)

## Single Lift Transport

**Model: VPDDR-32**

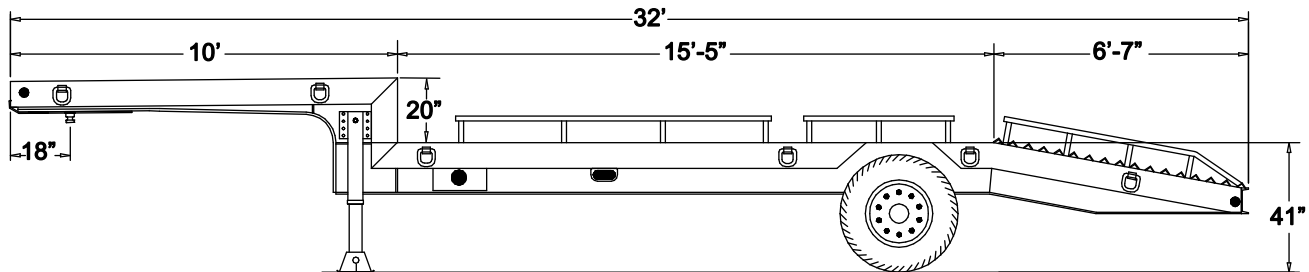

**102" Wide Weight 8,600 lbs. Plus or Minus 3% Capacity: 26,000 lb. GVWR**

### Features:

- Mainframe.....16" Fabricated main beams, 1/2" x 6" top flange and 3/4" x 6" bottom flange with 1/4" web welded on both sides. All flange and web material is high strength steel.
- Crossmembers.. 6" x 7.3# Jr. I-beam on 16" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 18" kingpin setting (standard).
- Siderails.....8" x 8.5# (Inverted) structural channel.
- Suspension.....HUTCH® H9700S three point spring suspension with hi-arch heavy duty 3 leaf springs.
- Axles..... (1) 25,000 Lb., 5" round, 5/8" wall.
- Brakes.....16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels.....8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires.....255/70R x 22.5 Radials.
- Landing gear.....Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Colors: black or red (standard). (optional: epoxy or zinc-rich primer available).
- Floor.....1-1/2" Shiplap treated pine (standard).
- Lights.....7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn.
- Tandem.....Single axle set at 108" from the rear of the dovetail.
- Dovetail..... 6' 6" Long, self-cleaning inverted angle iron.
- Loading ramps... (2) 6' Stand up ramps with double compression springs.
- D-rings.....(12) Total (4) 5/8" on front deck, (8) 1" on rear deck.

### Options:

- Flooring, apitong, steel
- 3 Third ramp for 3-wheel loader
- Optional paint colors available

**Bright Coop Inc.**  
803 West Seale St.  
Nacogdoches, Texas 75964  
(936) 564-8378 (800) 562-0730  
Fax (936) 564-3281  
[www.brightcoop.com](http://www.brightcoop.com)