

BRIGHT IDEAS.



BRIGHT INNOVATION.

35 Ton, Lowboy

Model: VDD46R16F35T

Approximate Weight 15,600 lbs.



Shown with Options

The Viking Specialized, 35 Ton Lowboy is one of the most versatile trailers on the market. This trailer is widely used to accommodate a variety of heavy equipment hauling. With a 35 ton rating this trailer allows you to haul heavy forklifts or other poultry handling equipment. Capacity: 86,000 lb. GVWR. For added capacity look at the 40 ton model. Capacity 100,000 lb. GVWR



Shown with Options


Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Transport Trailers

BE BRIGHT - BUY RIGHT - BUY BRIGHT'S



35 Ton, Lowboy

Model: VDD46R16f35T

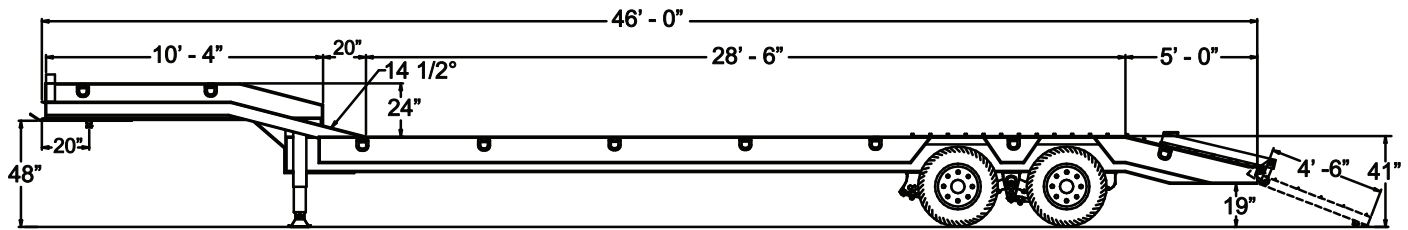

102" Wide Approximate Weight 15,600 lbs.

Capacity: 86,000 lb. GVWR

Features:

- Mainframe..... 16" Fabricated main beams, 1/2" x 6" top flange, 3/4" x 6" bottom flange with 1/4" web welded on both sides. All flange and web material is high strength steel.
- Crossmembers... 8" x 6.5# Jr. I beam on 20" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 84" swing clearance, 20" kingpin setting.
- Siderails..... 12 x 20.7# Structural channel; 8 x 8.5# structural channel on the neck.
- Suspension..... HUTCH® H9700T three point spring suspension with hi-arch heavy duty 3 leaf springs.
- Axles..... (2) 25,000 lb., 5" round, 5/8" wall.
- Brakes 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Landing gear..... Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Colors: black black, red, or cat yellow (standard).
- Floor..... 2" Nominal oak (standard), 1/4" tread plate with 1" traction bars over tandems and 1/4" tread plate on motor grader ramps.
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn. (standard).
- Tandem..... Set at 108" from the rear of the dovetail.
- Dovetail 5' Metal covered with 1/4" tread plate and 1" traction bars (Optional open floor dovetail with inverted angle iron for self cleaning).
- Loading ramps.... (2) 4'-6" Lay flat ramps with torsion springs. Motor grader ramps on front deck.
- D-rings..... 18 Total (4) 1" on front deck, (14) 1" on rear deck.

Options:

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> • Single point suspension • Air ride suspension • Flooring: apitong, shiplap pine, steel decking • Weld on winches • Longer and shorter trailer lengths | <ul style="list-style-type: none"> • Hydraulic assisted ramps • Third ramp located in the center for 3-wheel machines • Between the beam tool box • Epoxy primer and custom colors available • 6' Stand up ramps | <ul style="list-style-type: none"> • 3rd axle 40 ton capacity • 1-1/4" pipe railing • Tire inflation system <p>Please contact sales for more options.</p> |
|---|---|---|