

BRIGHT IDEAS.



BRIGHT INNOVATION.

Poultry Special Double Drop Deck

Model: VDDPS4996

Approximate Weight 14,000 lbs.



The poultry special double drop is designed solely for the addition and use of a 3-wheel lift. The ability to haul cages and a lift makes this complete package a must have in the poultry industry. Capacity: 80,000 lb. GVWR.



Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Transport Trailers


BE BRIGHT - BUY RIGHT - BUY BRIGHT'S

BRIGHT IDEAS.



BRIGHT INNOVATION.

Poultry Special Double Drop Deck Model: VDDPS4996

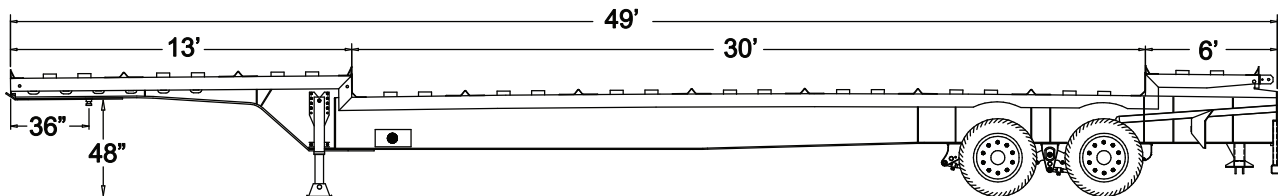

96" Wide Approximate Weight 14,000 lbs.

Capacity: 80,000 lb. GVWR

Features:

- Mainframe..... 24" Fabricated main beams with 2" camber, 1/2" x 6" top and bottom flanges in the rear portion of the trailer with 1/4" web welded on both sides. 1/2" x 6" Top flange and 5/8" x 5" bottom flange in the neck. All flange and web material is high strength steel.
- Crossmembers..... 4" x 3.2# Jr. I beam on 26" centers. Formed angles on top of the main beams and siderails serve as cage nesting devices and provide a 4-3/4" air space between the cages.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 36" kingpin setting (standard).
- Siderails..... 6" x 8.2# (Inverted) structural channel. Two nesting devices between each formed angle.
- Suspension..... HUTCH® H9700T three point spring suspension with hi-arch heavy duty 3 leaf springs.
- Axles..... (2) 25,000 Lb., 5" round, 5/8" wall.
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc; hub piloted (color: white).
- Tires..... 11R x 22.5 Radials.
- Landing gear..... Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Poultry special trailers are shotblasted and primed with zinc-rich primer and top coated with a high solid polyurethane paint. Colors: black, red or cat yellow (standard).
- Floor..... 10 ga. Steel is standard over the kingpin and tandem areas only.
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn (4 Light cornering system and back-up lights are available).
- Tandem..... 105" Tandem setting from the rear of the trailer with 49" axle spacing. Optional settings are available.
- Tiedowns..... 3/4" Tie bar located under the crossmembers running the full length of the trailer for chain and binder attachment.
- Rear bumper..... D.O.T. certified rear under ride guard/bumper and high visibility reflective conspicuity tape.
- Lift kit..... For 3 wheel forklift.

Options:

- Air ride suspension
 - Front and rear bulkheads
 - Fully floored with 10 gauge steel
 - (22) 4" Weld-on or bolt-on winches
 - Custom paint colors
 - Polished or machine finished aluminum wheels
 - D-rings
 - 3-Wheel lift transport kit
 - Improved stability system
 - Tire inflations system
- Please contact sales for more options

BE BRIGHT - BUY RIGHT - BUY BRIGHT'S