

BRIGHT IDEAS.



BRIGHT INNOVATION.

35 Ton, "Loadhandler" Lowboy

Model: VFD46R16F35T

Approximate Weight 16,000 lbs.



The Viking Specialized, 35 Ton "Lowboy" is one of the most versatile trailers on the market. This heavy duty Lowboy trailer has proven itself for transporting heavy equipment and materials from job to job. Capacity: 86,000 lb. GVWR.

Shown: 3 Axle 40 Ton, "Loadhandler" Lowboy

Model: VFD46R16F40T

Approximate Weight 18,900 lbs.




Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Transport Trailers

BE BRIGHT - BUY RIGHT - BUY BRIGHT'S



35 Ton, "Loadhandler" Lowboy Model: VFD46R16F35T

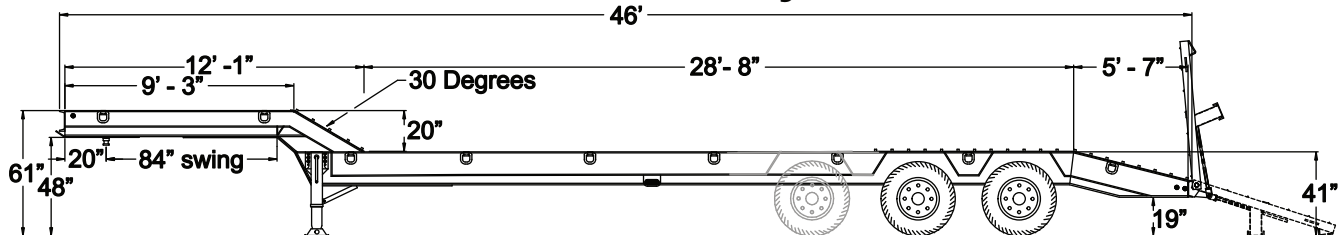

35 Ton, 2 Axle 102" Wide Approximate Weight 16,000 lbs.
 40 Ton, 3 Axle 102" Wide Approximate Weight 18,900 lbs.

Capacity: 86,000 lb. GVWR
 Capacity: 100,000 lb. GVWR

Features:

- Mainframe..... 16" Fabricated main beams, 1/2" x 6" top flange and 3/4" x 6" bottom flange with 1/4" web welded on both sides. All flange and web material is high strength steel.
- Crossmembers..... 8" x 6.5# Jr. I beam on 16" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 20" kingpin setting, 84" swing clearance.
- Siderails..... 12" x 20.7# Structural channel, 8" x 8.5# structural channel on the neck.
- Suspension..... HUTCH® H9700T three point spring suspension with hi-arch heavy duty 3 leaf springs (40 ton model, HUTCH® H9700TRI four point spring suspension).
- Axles (2) 25,000 Lb., 5" round, 5/8" wall (40 ton model (3) 25,000 lb. 5" round, 5/8" wall).
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle (40 ton model, 4S/2M).
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Landing gear..... Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Colors: black, red, or cat yellow (standard).
- Floor..... 2" Nominal oak (standard), 1/4" tread plate with 1" traction bars over tandems. 1/4" Smooth plate with 1" traction bars on transition to the upper deck.
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn. (standard)
- Tandem..... Set at 108" from the rear of the dovetail.
- Dovetail..... 5 ft. Metal covered with 1/4" tread plate and 1" traction bars (Optional open floor dovetail with inverted angle iron for self cleaning).
- Loading ramps..... (2) 6' Stand up ramps with double compression springs on each ramp that assist in raising and lowering.
- D-rings..... 18 Total (4) 1" on front deck, (14) 1" on rear deck.

Options:

- Single point spring suspension
- Air ride suspension
- Flooring: apitong, shiplap pine or steel decking
- Weld on winches
- Longer and shorter trailer lengths
- Hydraulic assisted ramps
- Third ramp located in the center for 3-wheel machines
- Epoxy primer and custom colors available
- 4'-6" Lay flat ramps
- 3 Axle 40 ton capacity
- 1-1/4" pipe railing
- Tire inflation system

Please contact sales for more options