

BRIGHT IDEAS.



BRIGHT INNOVATION.

Two Lift Transport Model: VPDDR-45

Approximate Weight 12,600 lbs.



The Two Lift Transport trailer was designed to deliver two 4-wheel machines on site. It also has the ability to haul fuel and other items needed in the field on the upper deck. The two lift transport is a must have when getting equipment delivered on site. Three wheel machines can also be hauled with the addition of a third ramp. Capacity: 80,000 lb. GVWR.




Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Transport Trailers

BE BRIGHT - BUY RIGHT - BUY BRIGHT'S



Two Lift Transport

Model: VPDDR-45

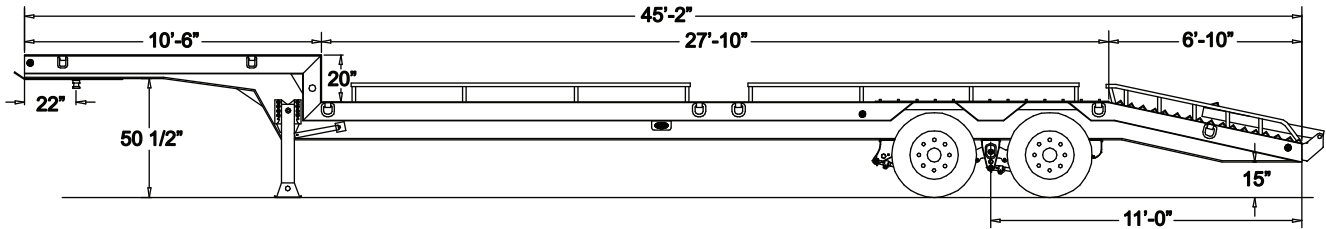

102" Wide Approximate Weight 12,600 lbs

Capacity: 80,000 lb. GVWR

Features:

- Mainframe..... 16" Fabricated main beams, 1/2" x 6" top flange and 3/4" x 6" bottom flange in the neck and 1/2" x 6" top and bottom flange in the lower deck with 1/4" web throughout that is welded on both sides for superior strength.
- Crossmembers...6" x 7.3# Jr. I-beam on 16" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 22" kingpin setting (standard).
- Siderails..... 8" x 8.5# (Inverted) structural channel.
- Suspension..... HUTCH® H9700T three point spring suspension with hi-arch heavy duty 3 leaf springs.
- Axles (2) 25,000 Lb., 5" round, 5/8" wall.
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Landing gear..... Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Colors: black, red or cat yellow (standard).
- Floor..... 1-1/2" Shiplap treated pine (standard). 1/4" tread plate with 1" traction bars over tandems.
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn.
- Tandem..... Set at 132" from the rear of the dovetail.
- Dovetail..... 6' 6" Long; self cleaning inverted angle iron.
- Loading ramps... (2) 6' Stand up ramps with double compression springs.
- D-rings..... 14 Total (4) 1" on front deck, (10) 1" on rear deck.

Options:

- Flooring: apitong wood flooring, or steel
 - Third ramp for 3-wheel field loader
 - Optional paint colors available
 - Epoxy or zinc-rich primer available
 - Tire inflation system
 - Single Lift Transport available
- Please contact sales for more options