

**BRIGHT IDEAS.**



**BRIGHT INNOVATION.**

**Poultry Platform Flat  
Model: VFPP4896**

**Approximate Weight 11,800 lbs.**



Designed specifically for the poultry industry. The Viking Specialized "Poultry Platform" is a fully floored poultry live transport trailer designed for chickens and turkey. Available with front and rear bulkheads that provide added security for cage transportation and panels can be added to block direct wind during transport. Capacity: 80,000 lb. GVWR.



**Shown with Options**

Bright Coop, Inc. is the authorized dealer for Viking Specialized - "Poultry" Transport Trailers


BRIGHT IDEAS.



BRIGHT INNOVATION.

## Poultry Platform Flat

Model: VFPP4896

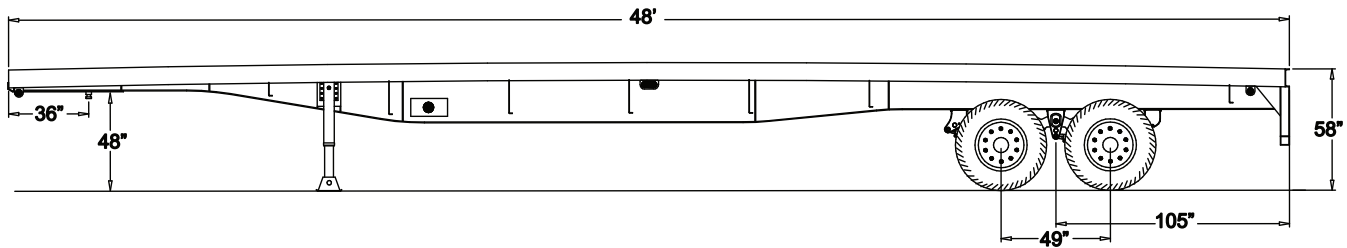

96" Wide Approximate Weight 11,800 lbs.

Capacity: 80,000 lb. GVWR

### Features:

- Mainframe..... 24" Fabricated main beams with 2" camber, 3/8" x 6" top and bottom flange with 1/4" web welded on both sides. All flange and web material is high strength steel.
- Crossmembers.... 6" x 3.7# Jr. I beam on 16" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 36" kingpin setting (standard).
- Siderails..... 8" x 8.5# Structural channel. (Inverted with nesting angles for chicken cages (smooth sides without nesting angles for turkey coops).
- Suspension..... HUTCH® H9700T three point spring suspension with hi-arch heavy duty 3 leaf springs.
- Axles..... (2) 25,000 Lb., 5" round, 5/8" wall.
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 11R x 22.5 Radials.
- Landing gear..... Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Poultry platform trailers are shotblasted, primed with zinc-rich primer and top coated with a high solid polyurethane paint. Color: black, red or cat yellow (standard).
- Floor..... 1-1/2" Treated shiplap pine (fully floored).
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn. (4 Light cornering system and back-up lights are available).
- Tandem..... 105" From the rear of the trailer with 49" axle spacing (optional settings available).
- Tiedowns..... 3/4" Tie bar located under the crossmembers running the full length of the trailer for chain and binder attachment (not included on turkey platform).
- Rear bumper..... D.O.T. certified rear under ride guard/bumper and high visibility reflective conspicuity tape. The poultry platform flat is a fully floored poultry live transport platform.

### Options:

- Air ride suspension
  - Front and rear bulkheads
  - Flooring, apitong, (stripped) configuration
  - (22) 4" Weld-on or bolt-on winches
  - Custom paint colors
  - Polished or machine finished aluminum wheels
  - D-rings
  - 3-Wheel lift transport kit
  - Improved stability system
  - Tire inflations system
  - Smooth sides for turkey application
- Please contact sales for more options

BE BRIGHT - BUY RIGHT - BUY BRIGHT'S